

Sicherheits-Verdrillzange

516/4



Profile




Produkteigenschaften

- Diese vielseitige Drillzange ermöglicht eine schnelle, gleichmäßige und zuverlässige Sicherheitsverdrahtung.
- Die Sicherheitsverdrahtung bleibt die bewährteste Methode, kritische Befestigungen zuverlässig zu sichern: Jeder kleinsten Lockerung wird durch das Festziehen des Sicherungsdrahts entgegengewirkt.
- Verdrill- und Schneidleistung:
- 0,5 mm rostfreier Draht ohne Wärmebehandlung
- 0,8 mm weicher Draht

Verwendung:

- Zum Verdrillen von Schrauben, Ölkappen, Ablasshähnen, Ventilen und elektrischen Steckverbindern zum Eindrehen

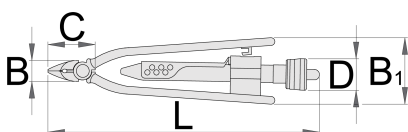

627530

L

213

B

19

B1

49

C

40

D


24




250

* Bilder von Produkten sind Symbolfotos. Abmessungen sind in mm, Gewichte in Gramm.


Verwendung (Bilder)




Thread the safety wire through your fastener(s) in the appropriate manner. You will now have two ends of the wire ready to twist.




Use the safety wire twisting pliers to grip the two wires at an appropriate distance from the fastener. The length of wires between the pliers and the fastener will be twisted in the following step.




Slide the central chromed locking sleeve to lock the plier handles together, clamping the wire ends.



Let go of the plier handles and pull the chrome handle at the base of the pliers to rotate the pliers and twist the wire in a clockwise direction.



You may need to pull this handle more than once to achieve the required number of twists. Generally around 7 twists per inch is recommended.



Squeeze the plier handles to release the chromed locking slider, and then use the integrated wire cutter to trim the wires to length.

